



**ADDENDUM - 01**

456 HIGH ST. • MT. HOLLY, NJ 08060 USA  
(609) 265-2652 • 21A100912100 • www.RYEBREAD.com

**DATE:**.....Friday, 09 April 2021  
**FROM:**.....Angelo P. Butera, AIA  
**VIA:** ..... Facsimile

**SUBJECT:**  
RYEB Project #5633B  
Mt. Holly Township BOE  
FACILITY IMPROVEMENTS  
NJDOE SP#: 3430-050-21-1000  
& 3430-060-21-1000

This addendum is issued to clarify, correct or supplement the Documents as originally issued and will become a part of the Contract. Receipt thereof shall be acknowledged by Bidders in space provided in the Form of Bid. Failure to acknowledge this Addendum on the official Form of Bid may be cause for rejection of Bid.

- 1.01. Clarification: Section 002000 - Form of Bid, Bidder shall correlate all required documents in the order listed on the Form of Bid & place an "X" in the box next to each item provided. Failure to provide all required documents and required number of copies may be cause for disqualification and rejection of bid.
- 1.02. Delete: Paragraph 2.7.C of Section 055213 of the Project Manual in its entirety. Aluminum handrails shall be mill finished.
- 1.03. Clarification: Section 122413 - Roller Window Shades as found in the Project Manual are to be provided for the windows of Rooms 307B, 307E & 307F in the Holbien School.
- 1.04. Delete: "and include their cost in the bid" as found in 1.8.A of Section 260500 of the Project Manual. All permit fees shall be reimbursed by the Owner as indicated in the Construction Notes on Sht U-A.1.
- 1.05. Replace: Folwell Note 09 on Sht F-A.1 it's entirety w/ the following:  


"Prep & paint stair tower walls, corridor door frame, stair risers & mesh guards, and stair bottom pan risers & treads. Do not paint stair aluminum handrails."
- 1.06. Add: The following to Folwell Note 15 on Sht F-A.1, "Prep & paint the corridor & room sides of all hollow metal door frames & sidelites."
- 1.07. Add: The following to Folwell Note 18 on Sht F-A.1, "Patch hole in frame head & prep for painting."
- 1.08. Replace: In it's entirety the 2nd paragraph of "Existing Concrete Floor" found in the Construction Notes on Sht U-A.1 w/ the following:  

"Grind, shot blast, clean & patch as per ASTM D4259, *Standard Practice for Abrading Concrete* to expose bare concrete & provide an acceptable level floor. Prepare surface to receive specified floor finish."
- 1.09. Add: Duct Bank Detail A to Sht F-E.2 for all conduit laid in trenches.

- 1.10. The list of current plan holders and addenda can be found at [www.ryebread.com](http://www.ryebread.com) under the "Bidding" tab.

Including this page, Addendum 01 consists of (03) page(s).

END OF ADDENDUM 01

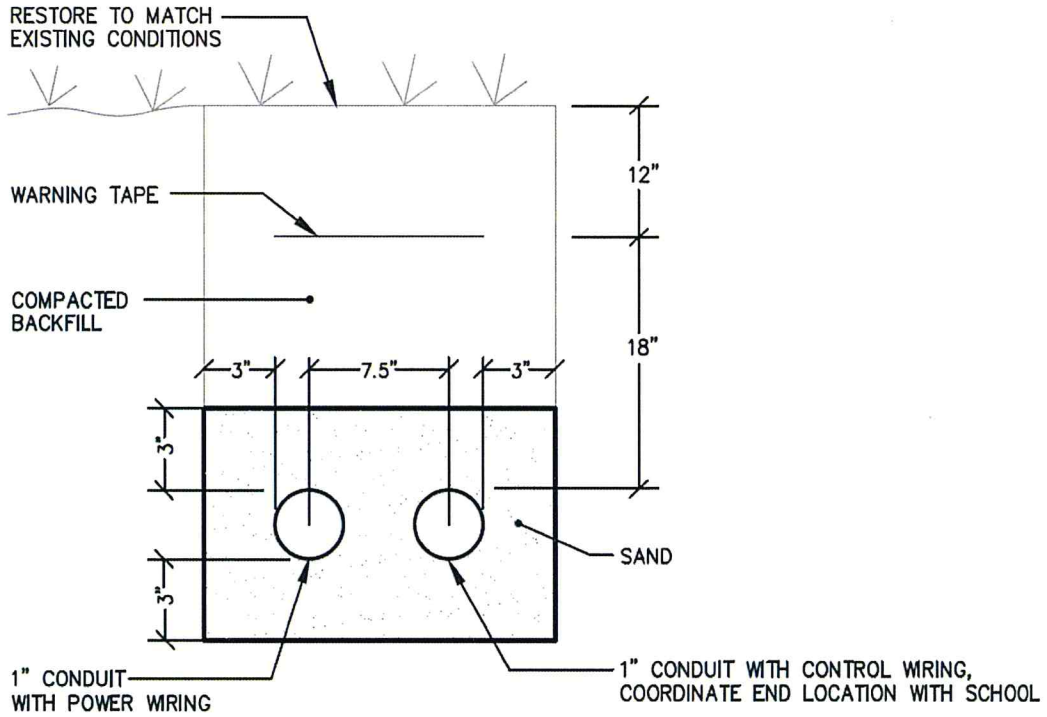

**A**  
**F-E.2**

**DUCT BANK DETAIL**  


---

**NOT TO SCALE**

TO BE USED W/ SIGN DETAIL

© 2021 REGAN YOUNG ENGLAND BUTERA, PC

NJDOE SP #3430-050-21-1000

<b>ADD-01</b> <b>F-E.2</b> 1 OF 1	DRAWN BY: <b>APB</b> COMMISSION NO. 5633B	DRAWING DATE: <b>XX APR 21</b> REVISION DATE:	<b>FACILITY IMPROVEMENTS &amp; ALTS</b> MOUNT HOLLY SCHOOL DISTRICT 331 LEVIS DRIVE MOUNT HOLLY, NEW JERSEY 08060 <b>FOLWELL DUCT BANK DETAIL</b>	<div style="background-color: #333; color: white; padding: 5px; text-align: center;"> <b>REGAN YOUNG ENGLAND BUTERA</b>  <small>REFERENDUMS • ENGINEERING • ARCHITECTURE • DESIGN</small> </div> 456 HIGH ST. • MT. HOLLY, NJ 08060 USA <small>(609)265-2652/-0333fax • 21A100912100 • ryebread.com</small>
---	---	---	---	--